

INSTALLATION

Tools Required:

Flat Screwdriver
Super glue

Time to install: 1-2 minutes

(plus glue drying time)

Step One – Verify all materials are included.

Be sure your purchase contains the materials you've requested. This should include the key cap itself, the hinge mechanism and a rubber cup which will be under the key when install is finished.




Step Two – Install rubber cup. (Skip this step if the cup is already in place)

The rubber cup must be installed prior to placing the hinge mechanism. To install, apply a small amount of glue around the outer rim of the cup and set it as centered as possible within the existing metal bracket on the keyboard.

Allow ample drying time before proceeding!

Step Three – Install hinge mechanism.

The hinge mechanism simply slides into place with this model. Lay the hinge mechanism flat with each of the four small protruding sections situated directly above each metal clip attached to the keyboard. Slide the hinge downward and it will clip into place if performed correctly.

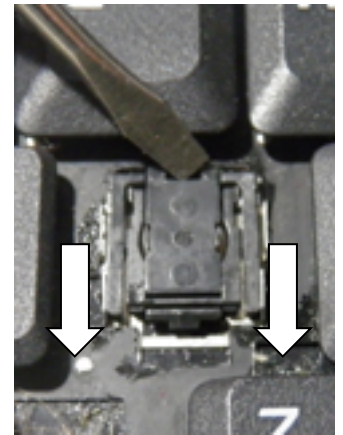

Step Four – Press key cap into place.

With the hinge now properly installed, you can simply snap the key cap into place.

Place the correctly oriented key cap centered over the hinge mechanism and press down. If the key cap clicks into place, you're all done!

