

INSTALLATION

Tools Required:

Flat Screwdriver
Super glue (optional)


Difficulty: **Hard**

Step One – Verify all materials are included.

Be sure your purchase contains the materials you've requested. This should include the key cap itself, the hinge mechanism and a rubber cup (optional) which will be under the key when install is finished.



Step Two – Separate hinge mechanisms from key cap and begin installation.

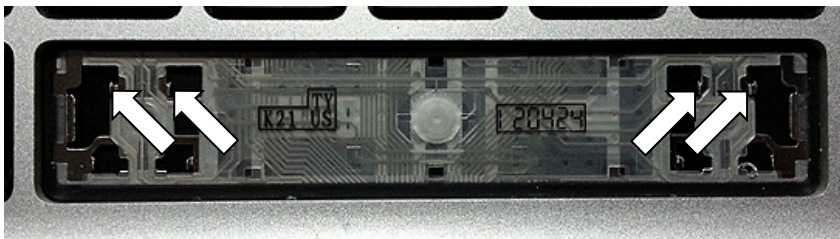

Hinges are pre-attached to each key for protection during shipping and must be removed to install. Take note of the orientation of the hinge mechanisms to help you with placement.

NOTE: Use caution when separating the pieces, as they are very fragile!

To install the hinge mechanism, begin by hooking one end over the protruding metal tabs located on the keyboard. A small flat screwdriver or blunt tweezers will assist you in this step.


Keep the flattest side of the hinge facing up so it is able to properly receive the key cap.

Step Three – Complete hinge mechanism install.

Press the other ends of the hinge mechanism onto the alternate tabs and it will lock into place. Be careful with this step, as forcing the hinge or placing too much stress on the hinge may cause it to break.



Step Four – Install rubber cup (optional), metal brackets, and press key cap into place.

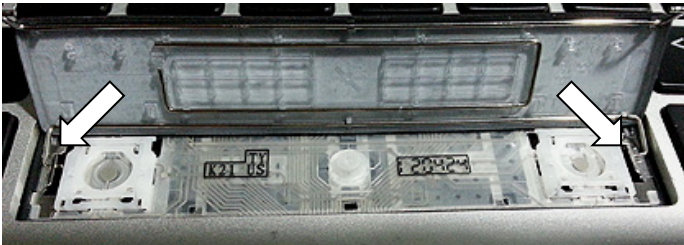

You can now attach the metal brackets on the key cap. To do so, simply place each bracket into their respective holes on the keyboard. If you cannot install these, the key cap can still be used without the stabilizer brackets. Once completed, you can rotate the key down into place. Keep the key cap centered over the installed hinges and press down. If the key cap clicks into place, you've finished the installation! Great job!



QuikFix Laptop Keyboard Keys

www.quikfixlaptopkeys.com